
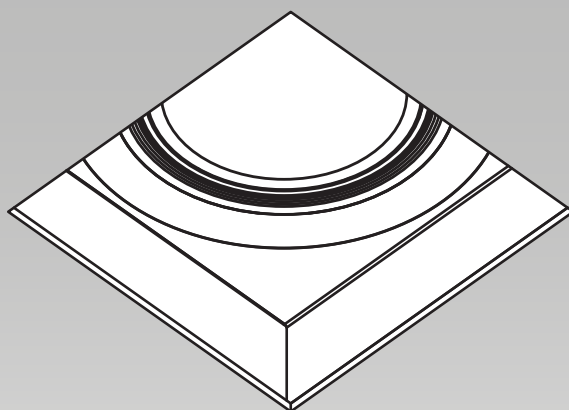


ANDES MINI
INSTALLATION INSTRUCTIONS
FRAME & PLASTER-IN VERSIONS


DLD
CONTRACT

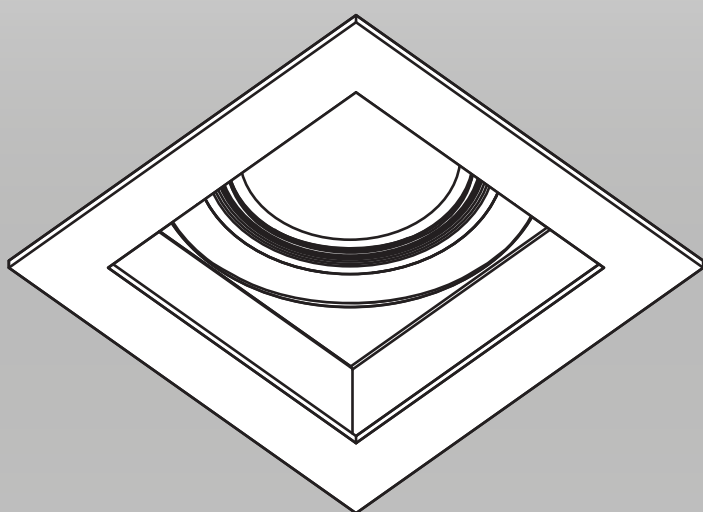


ANDES MINI
INSTALLATION INSTRUCTIONS
FRAME & PLASTER-IN VERSIONS

DLD
CONTRACT



LED LIGHT ENGINES

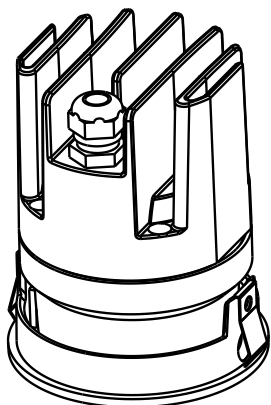

Fixed **IP65**

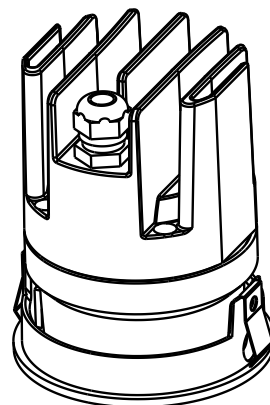

Adjustable by 24° **IP54**

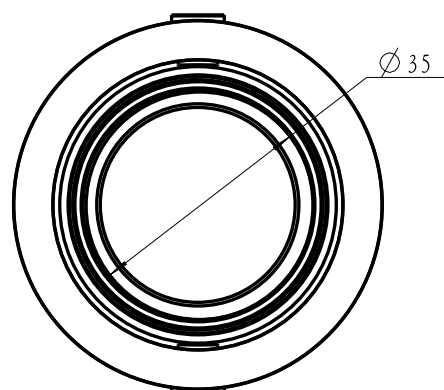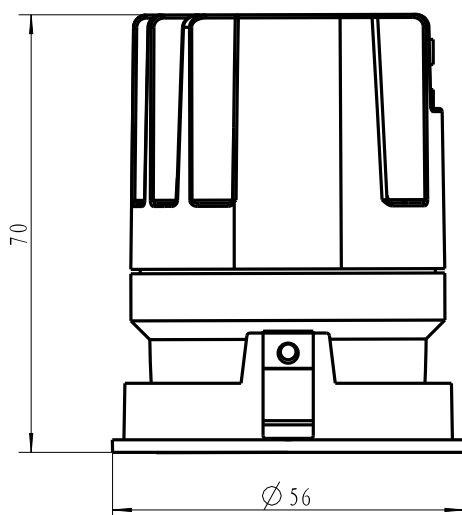

ANDES MINI



INSTALLATION INSTRUCTIONS

FRAME & PLASTER-IN VERSIONS



DLD

CONTRACT

FRAME WITH TRIM | CUT OUT SIZES

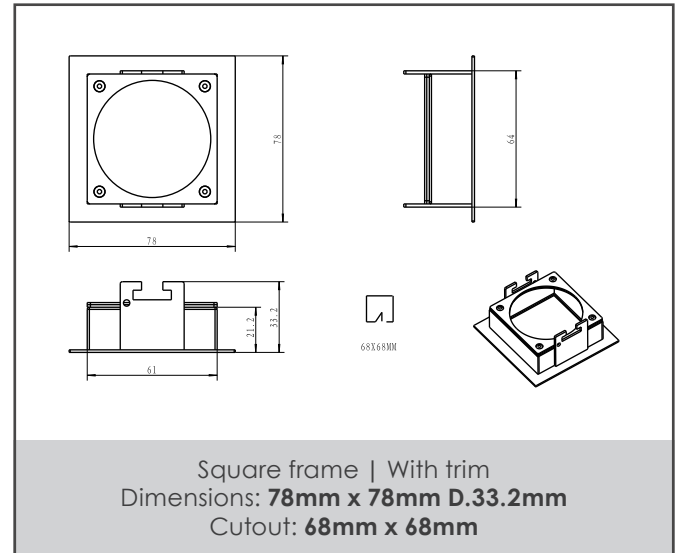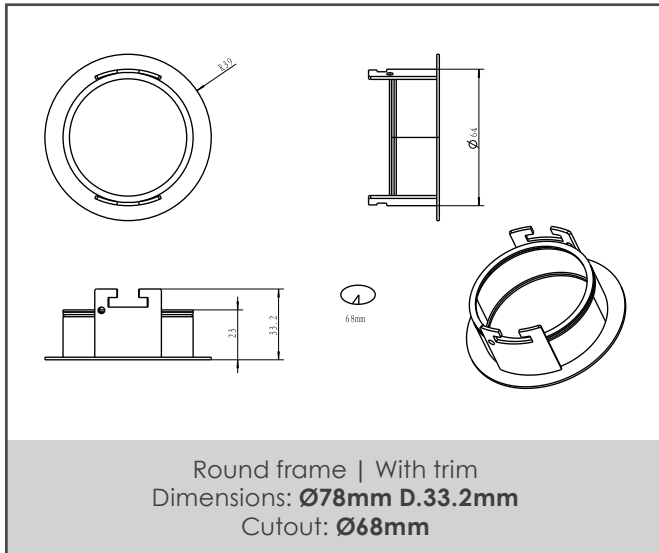

TRIMLESS PLASTER-IN FRAME | CUT OUT SIZES

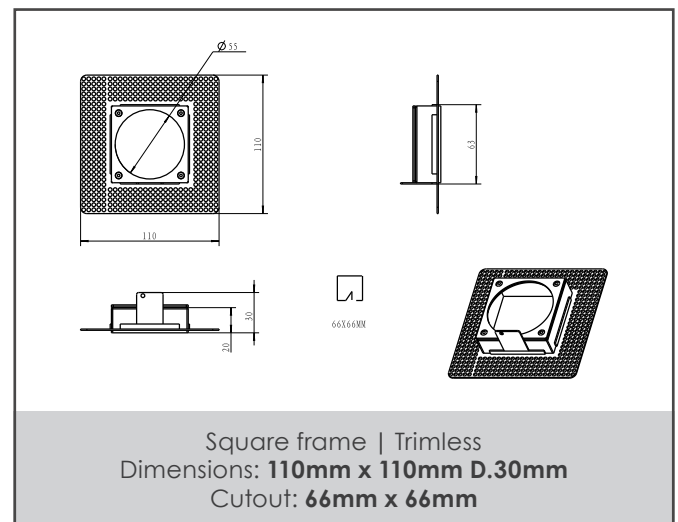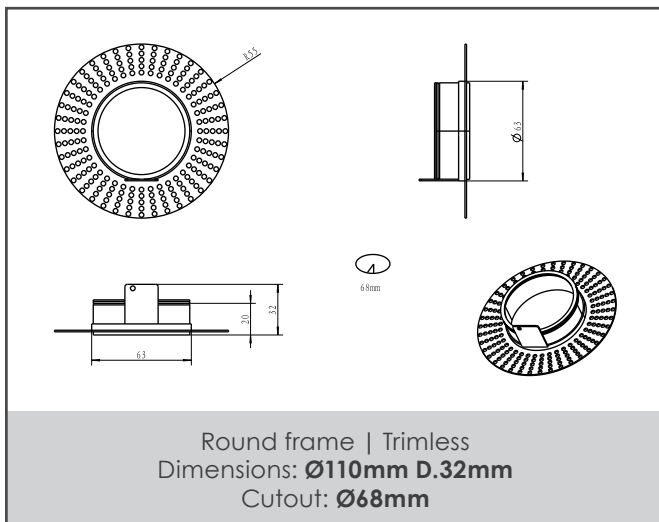

ANDES MINI

INSTALLATION INSTRUCTIONS




FRAME & PLASTER-IN VERSIONS

DLD

CONTRACT

INSTALLATION INSTRUCTIONS - ANDES WITH FRAME

It is recommended that this product is fitted by a qualified electrician.
Ensure that the power supply is turned off. Follow the steps below for installation or lamp replacement.
Once all steps have been completed, check that all screw are tightened before connecting the power supply.

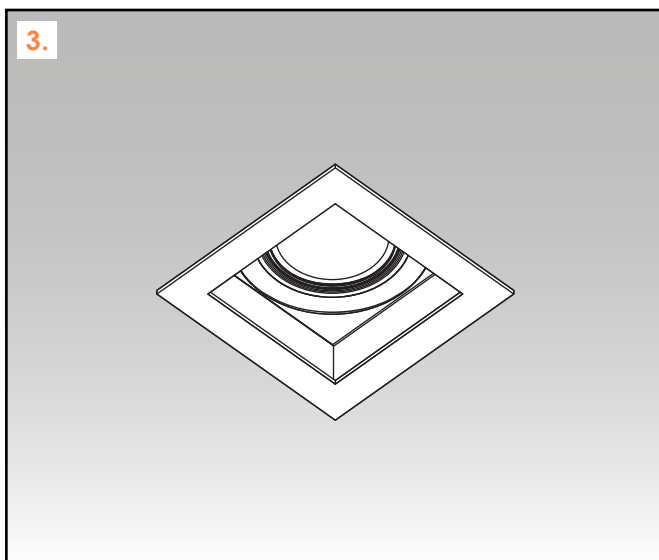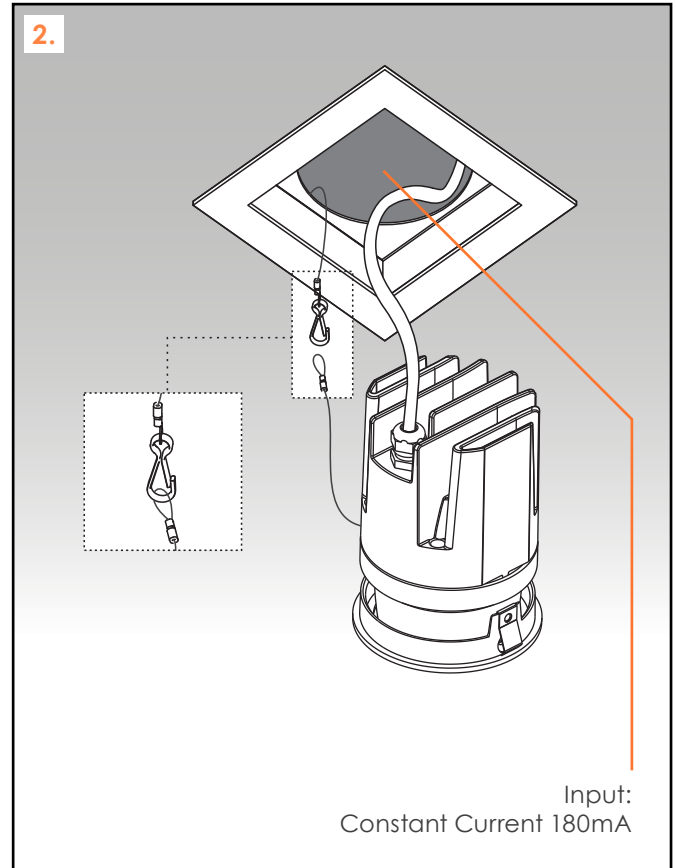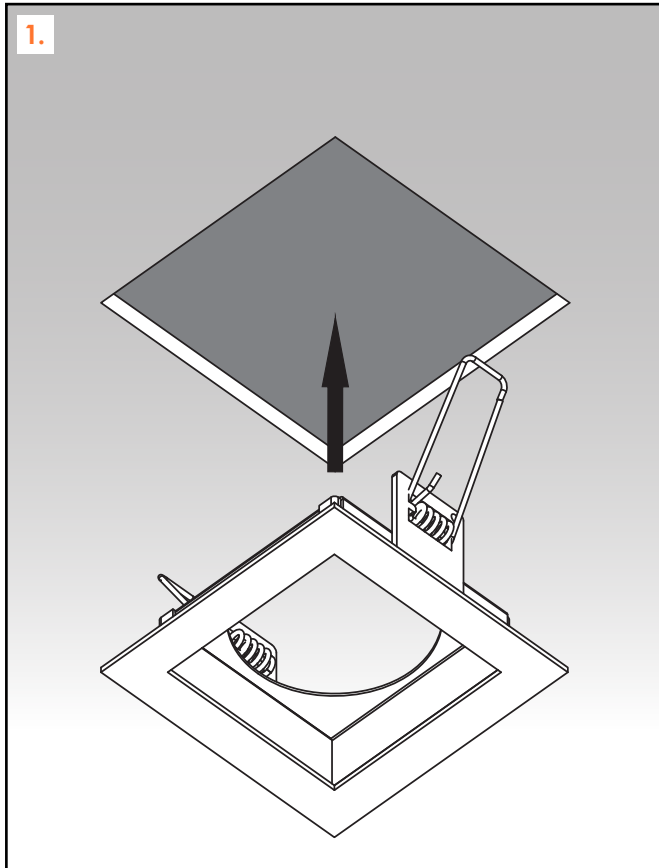

Only remove the protective plastic film from the lens **after** installation. For subsequent handling post-install, avoid contact with the lens if possible. Use cotton gloves if contact with the lens is unavoidable.

ANDES MINI

INSTALLATION INSTRUCTIONS


FRAME & PLASTER-IN VERSIONS

DLD


CONTRACT

INSTALLATION INSTRUCTIONS - ANDES PLASTER IN


It is recommended that this product is fitted by a qualified electrician.
Ensure that the power supply is turned off. Follow the steps below for installation or lamp replacement.
Once all steps have been completed, check that all screw are tightened before connecting the power supply.

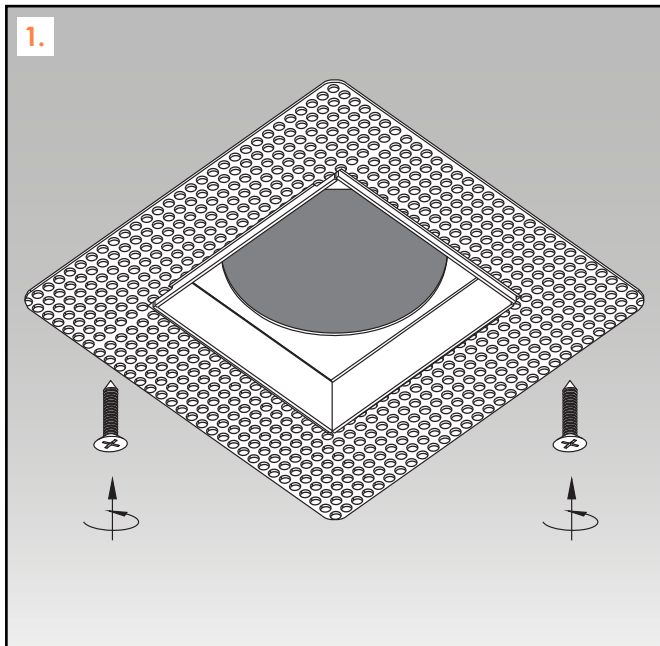


The plaster-in kits have been pre-coated in a rust proof powder coat.

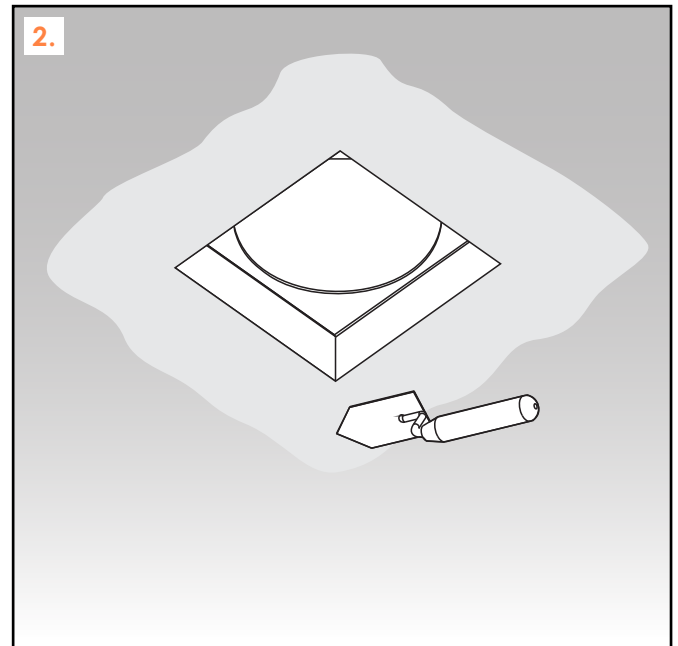

If the powder coat gets damaged during installation the kits must be resealed with a rust proof solution before continuing to skim with plaster.

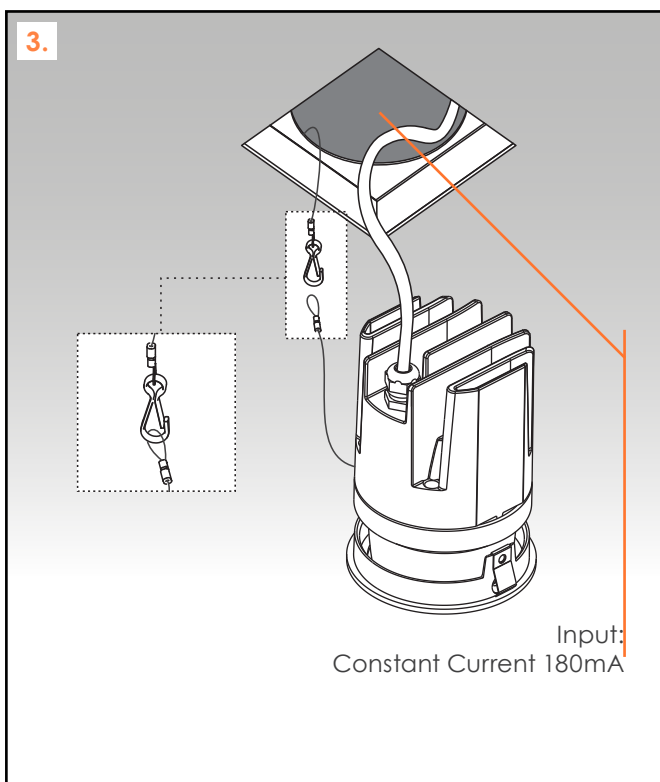

Only remove the protective plastic film from the lens **after** installation.


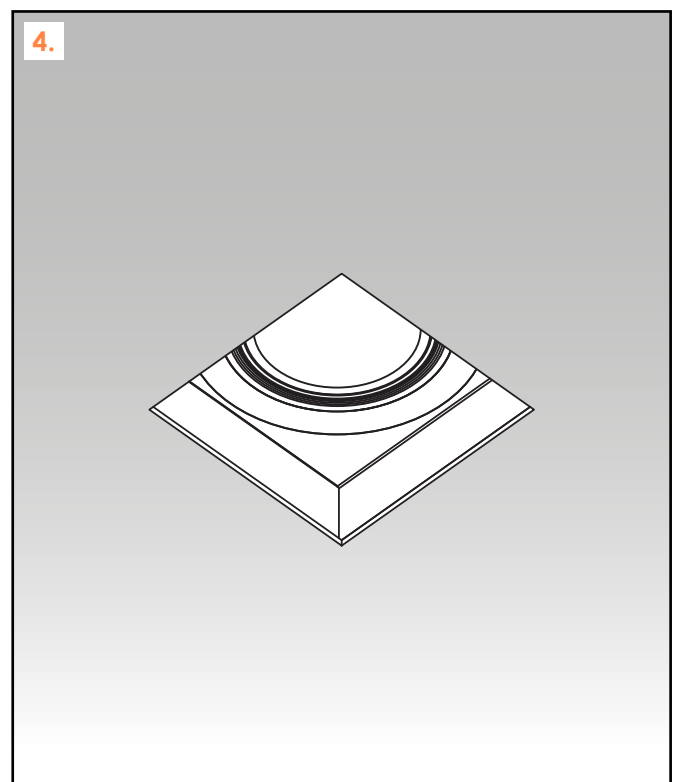


Avoid contact with the lens if possible post install. If contact with the lens is unavoidable, use cotton gloves.

ANDES MINI
INSTALLATION INSTRUCTIONS
FRAME & PLASTER-IN VERSIONS

DLD
CONTRACT

WIRING DIAGRAM

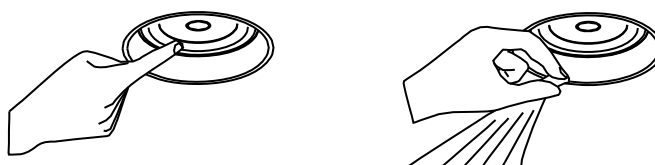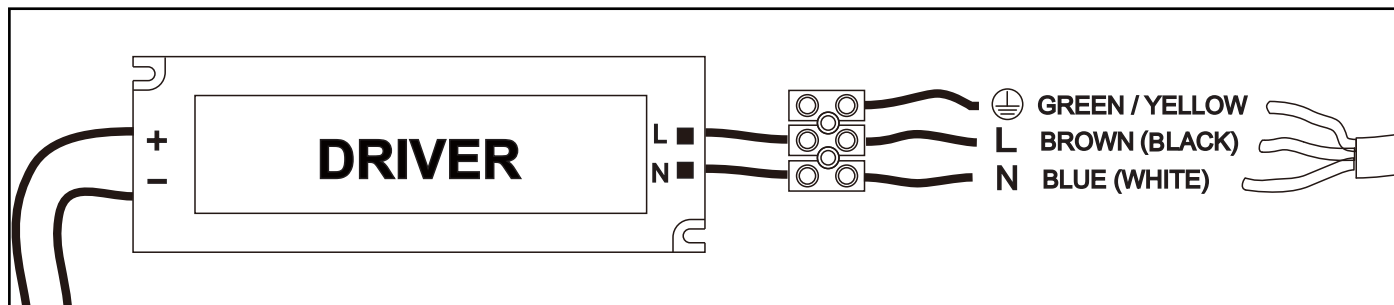

DISCLAIMER

- Only use power supplies which are certified according to the applicable IEC or 3C standards
- Check that the rating of the power supply matches that of the luminaire
- The maximum current rating must be taken into account
- The indicated typical voltage must not be used to select a constant voltage power supply. It is intended to be used to select a constant current power supply that is able to cover that typical voltage
- Take appropriate ESD measures. Avoid touching bare conductors
- LED luminaires or LED drivers should never be cleaned with chemical substances. LEDs can be damaged by contact with certain chemicals or chemical gasses
- The following substances have been proven to have a negative influence on LED performance, and must not be used in the direct environment of the LED luminaire:
 - Methyl acetate or ethyl acetate (i.e., nail polish remover)
 - Formaldehyde or butadiene (including Ashland PLIOBOND adhesive)
 - Loctite Sumo Glue
 - Gorilla Glue
 - Bleach, Bleach-containing cleaners, sprays
 - Loctite 384 adhesive
 - Loctite 7387 activator
- Remove insulation and/or provide sufficient ventilation so that the indicated maximum temperature is not surpassed
- Only connect the driver with the fitting only after the power is off. LEDs are susceptible to switching transients
- Respect polarity
- Don't test LED luminaires one by one on a power supply that is switched on



01189 889414



enquiries@dld-contract.co.uk



dld-contract.co.uk

DLD Contract Ltd
Unit 9 Brookside Business Centre
Church Road
Swallowfield
Reading
Berkshire
RG7 1TH